

ROAD BLOCKERS

CITY-LIGHT CYCLOPES



RELIABLE, PRACTICAL AND COST-EFFECTIVE SOLUTION TO
PROVIDE 100% SECURITY OF YOUR TERRITORY

City-light Cyclope designated for providing pedestrian friendly vehicle access control to protected perimeter. Comparing to bollards, TiSO Cyclope road blocker requires shallow mounting installation depth. This motorized platform has hydraulic drive and has been engineered to keep high intensity operation mode. Wide range of optional configurations enables it to be widely applicable security solution for variety of projects.



Installation areas

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Center
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions



www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global



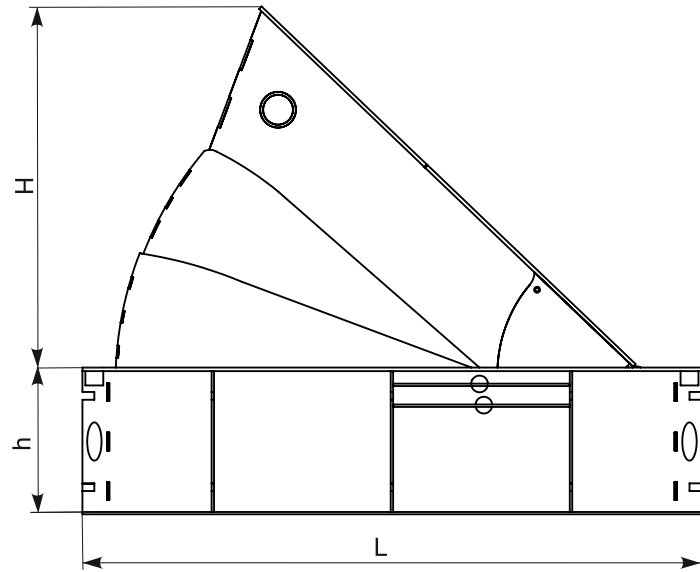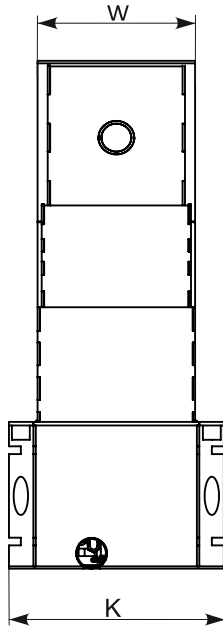

TECHNICAL SPECS:

Model	RB319-01
Installation type	Shallow mounted
Drive	Hydraulic
Width (W), mm	265
Height (H), mm	600
Installation depth, mm	246
Foundation case dimensions (LxKxh) , mm	1137x360x246
Axle load, t	15
Rising time, sec	~5
Lowering time, sec	~4
Operating temperature*, °C	-33/40
Power supply	1 phase 230 V, 50/60 Hz
Protection level	IP 67 for Road blocker IP 55 for control box
Materials	Brushed stainless steel AISI 304 Structural steel C22 (powder coated)

*for temperatures lower than -10 °C use the heating device
for temperatures higher than +40 °C use the cooler device



www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global

